

**TEDOM**

technology  
... in harmony  
with nature

## TEDOM C12 D



City Low-floor Bus



# TEDOM C12 D

**diesel**

- certificated Deutz engine
- reliable and economical operation
- prompt supplies of spare parts based on direct service representatives




Bodywork frame of stainless steel  
= long life span period of the vehicle




Service-free LED rear lights



Easy access when lights replacing

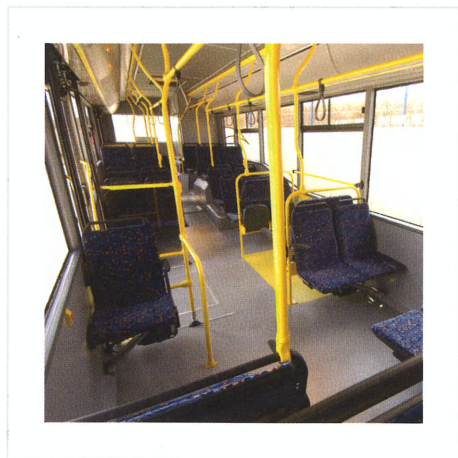


Spacious interior  
and wide doors for get on/off faster

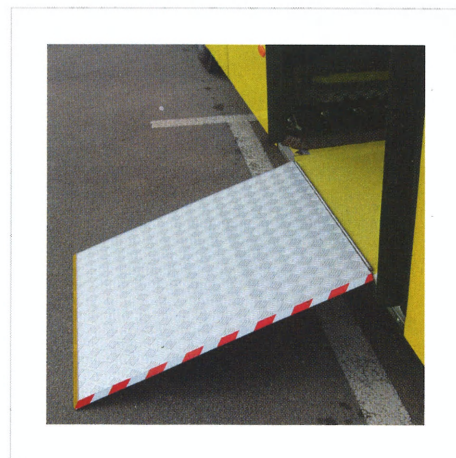

Ramp for easy access for  
wheelchair and pram



Transparent and electrically controlled  
roof windows for interior brightness

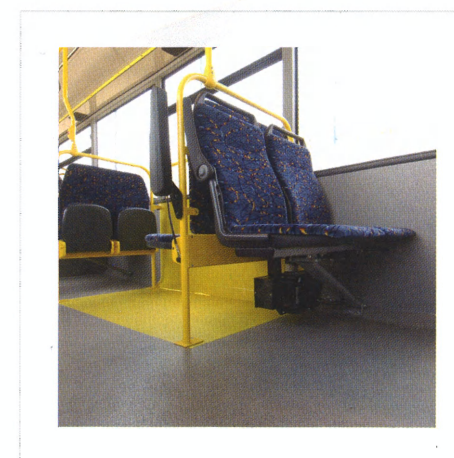

Low floor along the whole vehicle,  
seating fixed to the side walls



Open space and ergonomical  
driver's cabin

# Technical Information

## EXTERNAL DIMENSIONS

Length	12 030 mm
Width	2 550 mm
Height	3 040 mm
Wheel base	6 020 mm
Front body overhang	2 610 mm
Rear body overhang	3 400 mm
Width of the door ( 3 pcs)	1 200 mm
Approach/departure angle	7°
Total weight	up to 19 000 kg*

## CAPACITY


Total capacity	up to 102 persons*
Quantity of the seats	25 - 28
Tip-up seats	2 - 4
Wheelchairs	1 - 2

## FUEL SYSTEM

Fuel	diesel
Number of fuel tanks	2
Capacity of fuel tanks	250 l
Capacity of Ad Blue tank	50 l

## DEUTZ ENGINE

Vertically placed at the left rear side of the bus, 4 stroke 6-cylinder, with forced air filling by turbo blower and cooler of filling air.

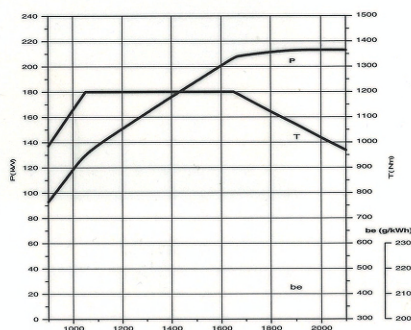

Displacement	7 140 cm <sup>3</sup>
Engine output	213 kW at 2100 rpm
Emission standard	EURO 5, EEV

## AXLES

Front axle	independent / fixed ZF
Rear axle	portal type ZF




## GEARBOX

Automatic 6-speed	ZF
Automatic 4-speed	VOITH

## OTHER COMPONENTS


Pneumatic system	WABCO
Steering	ZF

\* according to specific local conditions

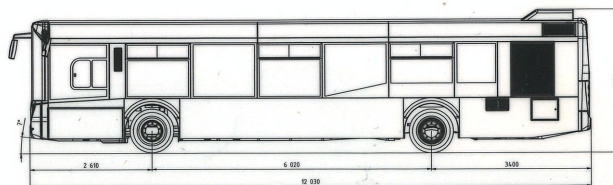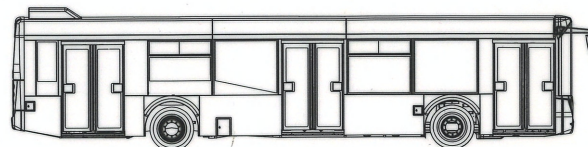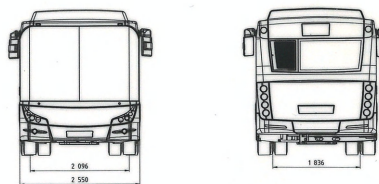

## POSITION OF SEATS

(can be modified to individual customer needs)

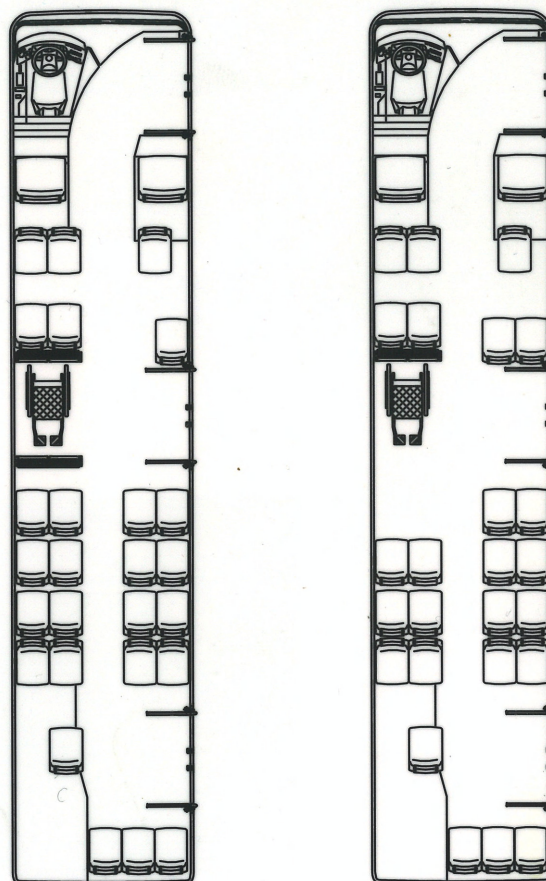

TEDOM s.r.o., Divize BUS, Hrotovická - průmyslová zóna 160, 674 01 Třebíč, CZ